

AD-A089 980

TECHNICAL  
LIBRARY

AD

MEMORANDUM REPORT ARBRL-MR-03052

SPIN JET DAMPING OF  
ROCKET-ASSISTED PROJECTILES

Charles H. Murphy

August 1980



US ARMY ARMAMENT RESEARCH AND DEVELOPMENT COMMAND  
BALLISTIC RESEARCH LABORATORY  
ABERDEEN PROVING GROUND, MARYLAND

Approved for public release; distribution unlimited.

DTIC QUALITY INSPECTED 3

Destroy this report when it is no longer needed.  
Do not return it to the originator.

Secondary distribution of this report by originating  
or sponsoring activity is prohibited.

Additional copies of this report may be obtained  
from the National Technical Information Service,  
U.S. Department of Commerce, Springfield, Virginia  
22151.

The findings in this report are not to be construed as  
an official Department of the Army position, unless  
so designated by other authorized documents.

*The use of trade names or manufacturers' names in this report  
does not constitute indorsement of any commercial product.*

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER MEMORANDUM REPORT ARBRL-MR-03052	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle)  SPIN JET DAMPING OF ROCKET-ASSISTED PROJECTILES		5. TYPE OF REPORT & PERIOD COVERED  Final
		6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s)  Charles H. Murphy		8. CONTRACT OR GRANT NUMBER(s)
9. PERFORMING ORGANIZATION NAME AND ADDRESS U.S. Army Ballistic Research Laboratory (ATTN: DRDAR-BLL) Aberdeen Proving Ground, MD 21005		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS  RDT&E 1L161102AH43
11. CONTROLLING OFFICE NAME AND ADDRESS U.S. Army Armament Research and Development Command U.S. Army Ballistic Research Laboratory (ATTN: DRDAR-BL), Aberdeen Proving Ground, MD 21005		12. REPORT DATE AUGUST 1980
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		13. NUMBER OF PAGES 24
		15. SECURITY CLASS. (of this report)  Unclassified
15a. DECLASSIFICATION/DOWNGRADING SCHEDULE		
16. DISTRIBUTION STATEMENT (of this Report)  Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number)		
Rocket-Assisted Projectile (RAP)      Rocket Thrust M549 Projectile                              Pitch Jet Damping M650 Projectile                              Spin Jet Damping		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) (jah)		
A theory is developed to predict the spin-up of a rocket-assisted projectile during burning. The percentage change in spin is shown to be proportional to the percentage change in the spin moment of inertia. Observed 2% increments in spin are about half the predicted maximum increment.		

## TABLE OF CONTENTS

	Page
I. INTRODUCTION. . . . .	5
II. THEORY. . . . .	5
III. DISCUSSION. . . . .	10
IV. EXPERIMENTAL RESULTS. . . . .	13
V. SUMMARY . . . . .	13
REFERENCES. . . . .	15
LIST OF SYMBOLS . . . . .	17
DISTRIBUTION LIST . . . . .	21

## I. INTRODUCTION

The thrust of a rocket is produced by the high-speed discharge of gases to the rear of the rocket. In effect, the rearward linear momentum of the rocket gases is balanced by an increased forward momentum of the rocket. In the case of a rocket with pitching and yawing motion, these gases also possess angular momentum in pitch and yaw and a careful dynamics analysis shows a damping of the pitching and yawing motion associated with this gaseous angular momentum. This pitch jet damping is usually fairly small. For Army rocket-assisted projectiles (RAPs), it is completely negligible.

A spinning RAP ejects gases with spin angular momentum and the effect of this lost angular momentum should be considered. In this report an expression for the spin jet damping of a rocket is derived and the size of this effect is computed for two Army RAPs: the 155mm M549 and the 8-inch M650. The predicted change in spin will then be compared with actual flight measurements made by sunsondes with onboard telemetry transmitters<sup>1-2</sup>.

## II. THEORY

We will use the usual nonrolling aeroballistic  $x, \tilde{y}, \tilde{z}$  axes with the  $x$ -axis along the rocket's axis of symmetry and the  $\tilde{z}$ -axis selected to be initially downward-pointing. If the rocket is flying at zero angle of attack, the only aerodynamic force acting on the rocket is the drag force  $\vec{F}_D$ . For small angles of attack and sideslip, the  $x$ -component of this force is  $F_D = |\vec{F}_D|$ . The  $x$ -component of the linear momentum of the rocket body plus propellant at time  $t$  will be denoted by  $A_x(t)$ . The derivative of  $A_x$  will then be equal to  $-F_D$  plus the  $x$ -component of the gravity force.

- 
1. William H. Mermagen, "Measurements of the Dynamic Behavior of Projectiles over Long Flight Paths," *Journal of Spacecraft and Rockets* 8, April 1971, pp. 380-385. (See also Ballistic Research Laboratories Memorandum Report No. 2079, November 1970, AD 717002.)
  2. Charles H. Murphy, "Effect of Large High-Frequency Angular Motion of a Shell on the Analysis of Its Yawsonde Records," *Ballistic Research Laboratories Memorandum Report No. 2581*, February 1976, AD B009421L.

$$\dot{A}_x = -F_D + m g_x \quad (1)$$

It is very important to note that the derivative in Equation (1) is the rate of change of linear momentum for the constant-mass system of rocket plus propellant and must be calculated with care. At time  $t_0 + \Delta t$  the rocket has a mass  $m + \Delta m$  (where  $\Delta m$  is negative) and an x-component of velocity,  $u + \Delta u$ . A mass of propellant gas,  $-\Delta m$ , has separated from the rocket and is traveling away from the rocket in the exhaust jet with a velocity x-component  $u_J$  relative to the rocket.

The new linear momentum is, therefore,

$$A_x(t_0) + \Delta A_x = (m + \Delta m) (u + \Delta u) + (-\Delta m) (u + u_J) \quad (2)$$

where

$$A_x(t_0) = m u$$

Equation (2) is divided by  $\Delta t$  and the limit as  $\Delta t \rightarrow 0$  is taken to obtain  $\dot{A}_x$ . This result can be substituted in Equation (1) to yield

$$m \dot{u} = F_T - F_D + m g_x \quad (3)$$

where

$$F_T = \dot{m} u_J \quad \text{is the x-component of the thrust of the rocket.}$$

This simple derivation of rocket thrust has been done so that we can see the proper way to estimate the jet effect on the angular motion of the rocket. If the components of the angular momentum of the rocket are  $(H_x, H_y, H_z)$ , the angular motion must satisfy the following vector differential equation:

$$(\dot{H}_x, \dot{H}_y, \dot{H}_z) + (0, \tilde{q}, \tilde{r}) \times (H_x, H_y, H_z) = (M_x, M_y, M_z) \quad (4)$$

We will assume that the rocket grain burns symmetrically so that the x-axis remains an axis of mass symmetry and the transverse moments of inertia remain equal. The angular momentum of the solid part of the rocket is then

$$\vec{H}_S = (I_x p, I_t \tilde{q}, I_t \tilde{r}) \quad (5)$$

and at time  $t_0$

$$\begin{aligned} \vec{H} &= (H_x, H_y, H_z) \\ &= (I_x p + h_x, I_t \tilde{q} + h_y, I_t \tilde{r} + h_z) \end{aligned} \quad (6)$$

where the  $h_j$ 's are the angular momentum components of the gas in the rocket motor.

At time  $t_0 + \Delta t$ , the angular momentum of the solid part has slightly changed and some propellant gas of mass  $\Delta m$  has been emitted from the nozzle, but the small change in the angular momentum of the gas in the motor will be neglected.

The angular momentum  $\vec{h}_J$  of the emitted gas can be expressed as a sum of volume elements:

$$\vec{h}_J = \sum (\vec{R}_J \times \vec{V}_J) \rho_J \Delta(\text{Vol}) \quad (7)$$

where  $\vec{R}_J$ ,  $\vec{V}_J$  and  $\rho_J$  are, respectively, the position, velocity and density of the jet of propellant gas in the particular volume element:

$$\vec{R}_J = (x, R \cos\theta, R \sin\theta) \quad (8)$$

$$\vec{V}_J = (u_J, \tilde{v}_J, \tilde{w}_J) \quad (9)$$

$$\Delta(\text{Vol}) = R \Delta R \Delta\theta \Delta x \quad (10)$$

and where  $R$  and  $\theta$  are polar coordinates. In the time interval  $\Delta t$ , the emitted gas forms a disk of thickness  $\Delta x = u_J \Delta t$  and radius equal to that of the rocket nozzle exit,  $R_n$ , located a distance  $X_n$  from the projectile c.m.

$$\begin{aligned} \therefore \vec{h}_J = \rho_J \Delta x \int_0^{R_n} \int_0^{2\pi} & \left( R(\tilde{w}_J \cos\theta - \tilde{v}_J \sin\theta) , \right. \\ & R u_J \sin\theta - X_n \tilde{w}_J , \\ & \left. X_n \tilde{v}_J - R u_J \cos\theta \right) R dR d\theta \end{aligned} \quad (11)$$

The transverse motion of the exhaust gases is assumed to be the sum of the pitching motion of the nozzle and a rotationally symmetric circumferential motion due to projectile spin.

$$\tilde{v}_J = \tilde{r} X_n - p R_n f(\hat{R}) \sin\theta \quad (12)$$

$$\tilde{w}_J = -\tilde{q} X_n + p R_n f(\hat{R}) \cos\theta \quad (13)$$

where

$$\hat{R} = R/R_n$$

$$f(0) = 0, f(1) = 1 .$$

Equations (12-13) allow the angular momentum of the gas emitted in the time interval  $\Delta t$  to be written in a very simple form.

$$\vec{h}_J = (R_n^2 F p, X_n^2 \tilde{q}, X_n^2 \tilde{r}) (-\Delta m) \quad (14)$$



where

$$F = 2 \int_0^1 \hat{R}^2 f(\hat{R}) d\hat{R}$$

Equation (14) now allows us to compute the change in angular momentum of the system.

$$H_x + \Delta H_x = (I_x + \Delta I_x)(p + \Delta p) + h_x - (R_n^2 F \Delta m)p \quad (15)$$

$$H_{\tilde{y}} + \Delta H_{\tilde{y}} = (I_t + \Delta I_t)(\tilde{q} + \Delta \tilde{q}) + h_{\tilde{y}} - (X_n^2 \Delta m)\tilde{q} \quad (16)$$

$$H_{\tilde{z}} + \Delta H_{\tilde{z}} = (I_t + \Delta I_t)(\tilde{r} + \Delta \tilde{r}) + h_{\tilde{z}} - (X_n^2 \Delta m)\tilde{r} \quad (17)$$

Equations (15-17) can be simplified by Equation (6), divided by  $\Delta t$ , and the limit taken as  $\Delta t \rightarrow 0$  to yield the derivatives of the angular momentum components. Then Equation (4) becomes

$$I_x \dot{p} + \tilde{q} h_{\tilde{z}} - \tilde{r} h_{\tilde{y}} = J_p p + M_x \quad (18)$$

$$I_t (\dot{\tilde{q}} + i \dot{\tilde{r}}) - i (I_x p + h_x) (\tilde{q} + i \tilde{r}) = J_q (\tilde{q} + i \tilde{r}) + (M_{\tilde{y}} + i M_{\tilde{z}}) \quad (19)$$

where

$$J_p = \dot{m} R_n^2 F - \dot{I}_x$$

$$J_q = \dot{m} X_n^2 - \dot{I}_t$$

The small terms in the angular momentum of the motor gas are usually neglected so that the only effects of the propellant gases on the angular motion of the rocket are the time-varying moments of inertia, the spin jet damping,  $J_p$ , and the pitch jet damping,  $J_q (\ddot{q} + i \ddot{r})$ .

### III. DISCUSSION

$J_q$  is the derivative of the change in pitch moment of inertia of the propellant gases and is negative. Thus this term damps the pitching motion, producing the well-known pitch jet damping effect. As we shall see, for Army RAPs the pitch jet damping moment is much smaller than the aerodynamic damping moment and has no measurable effect on the pitching motion.

If we assume that the radial variation in circumferential velocity is linear like that of a spinning rigid body, then  $f(\hat{R}) = \hat{R}$  and  $F = 1/2$ . For this case,  $J_p$  is the derivative of the change in spin moment of inertia of the propellant gases. Since  $J_p$  is positive, this term represents a spin jet undamping. Since it is unreasonable to expect the spin angular momentum of the emitted gases to drop to the low value associated with  $f(\hat{R}) = \hat{R}$ , this value yields a maximum value of  $J_p$  and we would expect the actual value to be less.

$$J_p = \epsilon (J_p)_{\max}, \quad 0 \leq \epsilon \leq 1 \quad (20)$$

where

$$(J_p)_{\max} = \dot{m} (R_n^2/2) - \dot{I}_x$$

The aerodynamic moment contains a spin damping term in  $p$  and a pitch damping term in  $\ddot{q} + i \ddot{r}$ . In order to compare the aerodynamic terms with the jet damping terms we will nondimensionalize the jet damping moments in the same way that the aerodynamic moments are nondimensionalized<sup>3</sup>.

---

3. Charles H. Murphy, "Free Flight Motion of Symmetric Missiles," Ballistic Research Laboratories Report No. 1216, July 1963, AD 442757.

$$J_p = \left(\frac{1}{2}\right) \rho V S \ell^2 C_{J_p} \quad (21)$$

$$J_q = \left(\frac{1}{2}\right) \rho V S \ell^2 C_{J_q} \quad (22)$$

In Table 1 the average values of  $\dot{I}_x$ ,  $\dot{I}_t$ ,  $\dot{m}$  and other appropriate parameters are given for two rocket-assisted projectiles, the 155mm M549 and the 8-inch M650. According to this table, the pitch jet damping coefficient is much smaller than the aerodynamic pitch damping coefficient and can be neglected, but the spin jet damping coefficient is the same size as the aerodynamic spin damping coefficient. We would therefore expect the spin to be affected by this term during burning.

Another way to estimate the effect of the spin jet damping is to consider Equation (18) for no aerodynamic moment and neglecting  $\dot{h}_y$  and  $\dot{h}_z$ .

$$\frac{\dot{p}}{p} = - \epsilon \gamma \left( \frac{\dot{I}_x}{I_x} \right) \quad (23)$$

where

$$\gamma = - (J_p)_{\max} / \dot{I}_x$$

$\gamma$  can be computed from the table and is 0.90 and 0.87 for the M549 and M650, respectively. Thus the percentage change in spin during burning can be approximately related to the percentage change in the spin moment of inertia.

$$\frac{\Delta p}{p} = - \epsilon \gamma \left( \frac{\Delta I_x}{I_x} \right) \quad (24)$$

$$= \begin{cases} 0.046\epsilon & \text{(M549)} \\ 0.033\epsilon & \text{(M650)} \end{cases}$$

TABLE 1. PARAMETERS FOR TWO ROCKET-ASSISTED PROJECTILES

	<u>155mm M549</u>	<u>8-inch M650</u>
burn-time (s)	2.68	2.95
$\dot{m}$ (kg/s)	- 1.12	- 1.86
$\dot{I}_x$ (kg-m <sup>2</sup> /s)	- .00285	- .00714
$\dot{I}_t$ (kg-m <sup>2</sup> /s)	- .0379	- .0803
$R_n$ (m)	.0222	.0317
$X_n$ (m)	.326	.365
$V$ (m/s)	481	603
$C_{\ell_p}$	- .0112	- .0113
$C_{M_q} + C_{M_{\dot{\alpha}}}$	-13.2	-11.9
$\left(C_{J_p}\right)_{\max}$	.019	.012
$C_{J_q}$	- .61	- .34

#### IV. EXPERIMENTAL RESULTS

Recently yawsonde data have been obtained<sup>4-5</sup> for the spin during burning of both the M549 and the M650. Sample spin histories for each RAP are given in Figure 1. The spin curve before burning was extended through burning and the percentage change in spin during burning was determined. It was 1.9% for the M549 and 1.7% for the M650. These values correspond to  $\epsilon$  values of 0.41 and 0.52, respectively.

#### V. SUMMARY

1. The derivation of rocket thrust and pitch jet damping has been reviewed.
2. A theoretical model for spin jet damping has been derived which predicts a percentage increase in spin proportional to the percentage decrease in the spin moment of inertia.
3. Experimental results show approximately 2% increase in spin, which is about half the predicted maximum increase.

- 
4. Anders S. Platou, "Yawsonde Flights of 155mm Non-Conical Boattail Projectiles and the 155mm M549 Projectile at Tonopah Test Range--October 1977," USA ARRADCOM Ballistic Research Laboratory Memorandum Report No. ARBRL-MR-02881, November 1978, AD A065356.
  5. Vural Oskay, Wallace H. Clay and Martin Klawns, "8-Inch PXR 6263 (Temperature Instrumented M650 RAP) Tests at Yuma Proving Ground," USA ARRADCOM Ballistic Research Laboratory Memorandum Report No. ARBRL-MR-03037, August 1980.

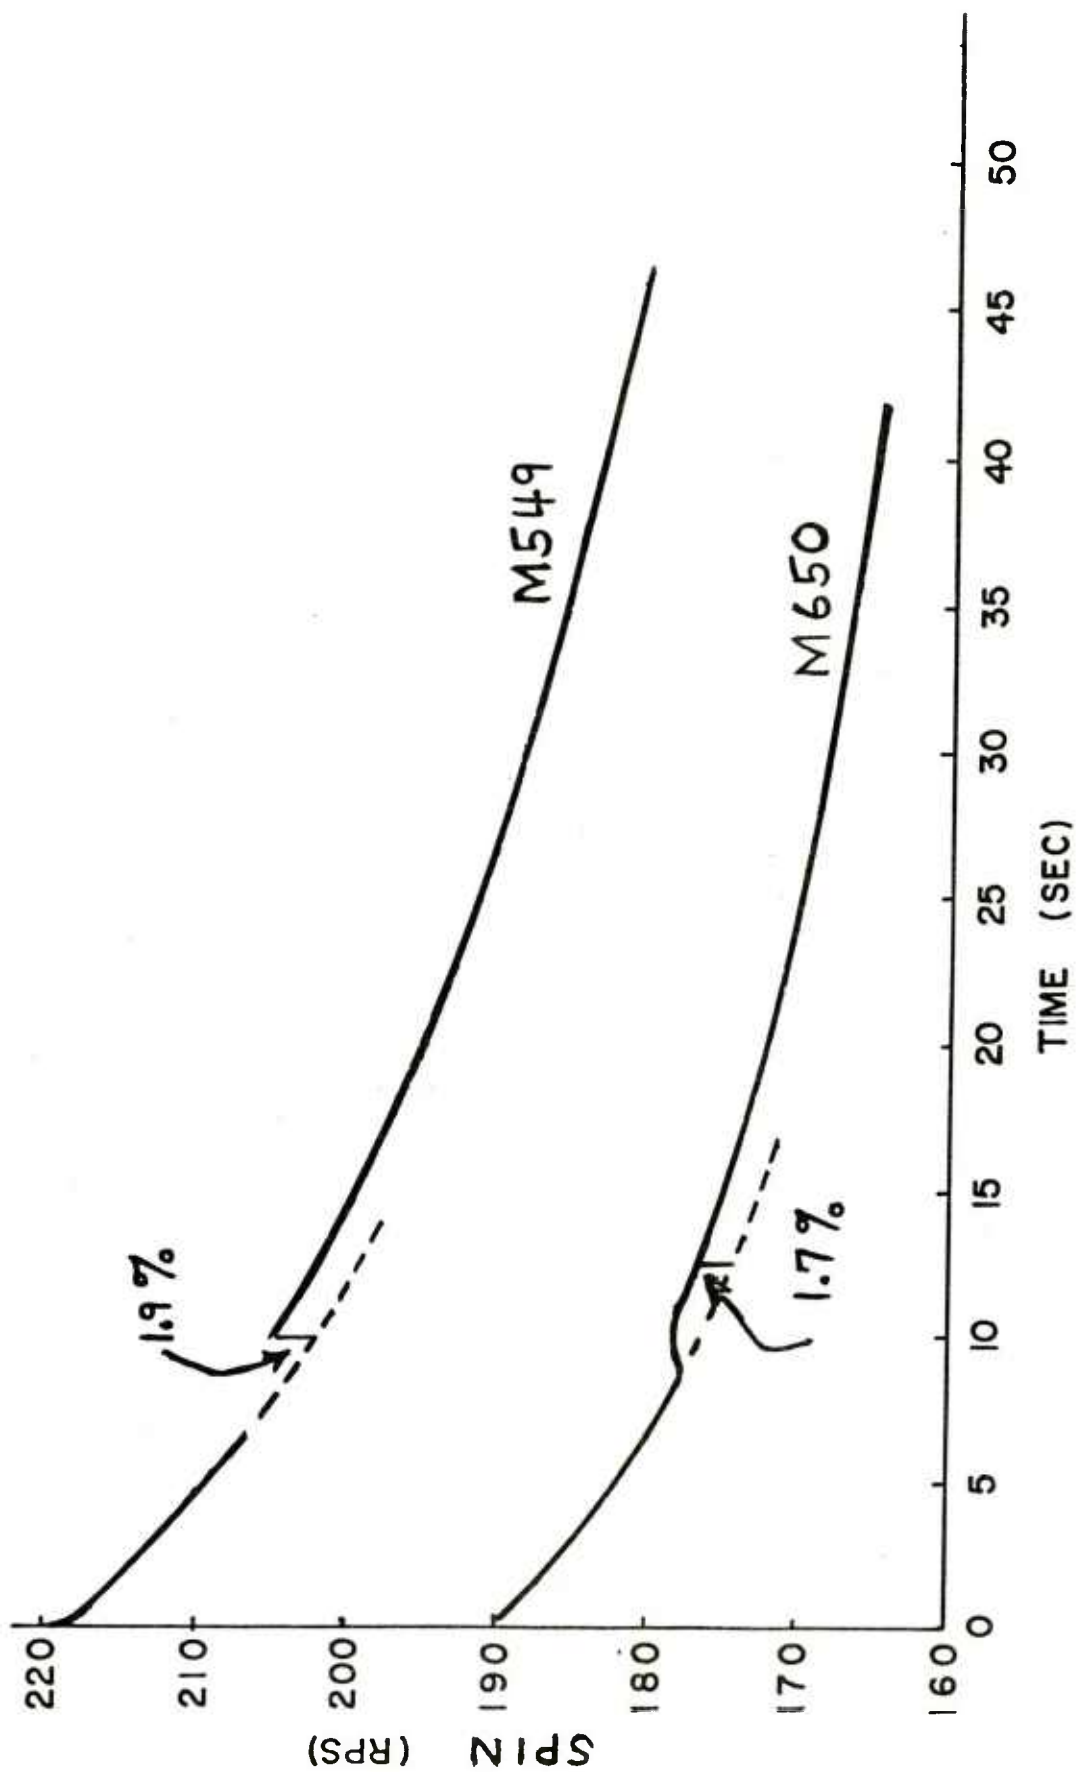


Figure 1. Measured spin histories for two rocket-assisted projectiles, showing the percentage spin-up during burning.

## REFERENCES

1. William H. Mermagen, "Measurements of the Dynamic Behavior of Projectiles over Long Flight Paths," *Journal of Spacecraft and Rockets* 8, April 1971, pp. 380-385. (See also Ballistic Research Laboratories Memorandum Report No. 2079, November 1970, AD 717002.)
2. Charles H. Murphy, "Effect of Large High-Frequency Angular Motion of a Shell on the Analysis of Its Yawsonde Records," Ballistic Research Laboratories Memorandum Report No. 2581, February 1976, AD B009421L.
3. Charles H. Murphy, "Free Flight Motion of Symmetric Missiles," Ballistic Research Laboratories Report No. 1216, July 1963, AD 442757.
4. Anders S. Platou, "Yawsonde Flights of 155mm Non-Conical Boattail Projectiles and the 155mm M549 Projectile at Tonopah Test Range--October 1977," USA ARRADCOM Ballistic Research Laboratory Memorandum Report No. ARBRL-MR-02881, November 1978, AD A065356.
5. Vural Oskay, Wallace H. Clay and Martin Klaw, "8-Inch PXR 6263 (Temperature Instrumented M650 RAP) Tests at Yuma Proving Ground," USA ARRADCOM Ballistic Research Laboratory Memorandum Report No. ARBRL-MR-03037, August 1980.

# LIST OF SYMBOLS

$A_x$  x-component of the linear momentum of the rocket body-plus-propellant system

$C_{J_p}$  
$$\frac{J_p}{(1/2) \rho V S \ell^2}$$

$C_{J_q}$  
$$\frac{J_q}{(1/2) \rho V S \ell^2}$$

$C_{\ell_p}$  roll damping moment coefficient

$C_{M_q} + C_{M_{\dot{\alpha}}}$  
$$\frac{\text{sum of the damping moments}}{(1/2) \rho V^2 S \ell (\tilde{q}^2 + \tilde{r}^2)^{1/2}}$$

$F$  
$$2 \int_0^1 \hat{R}^2 f(R) d\hat{R}$$

$F_D$   $|\vec{F}_D|$

$\vec{F}_D$  drag force

$F_T$   $\dot{m} u_J$  , x-component of the rocket thrust

$f(\hat{R})$  differentiable function of  $\hat{R}$ , where  $f(0) = 0$ ,  $f(1) = 1$  .

$g_x$  x-component of gravity acceleration

$\vec{H}$  angular momentum of the rocket

$\vec{H}_S$  angular momentum of the solid part of the rocket

$H_x, H_{\tilde{y}}, H_{\tilde{z}}$  aeroballistic system components of  $\vec{H}$



LIST OF SYMBOLS  
(Continued)

$\vec{h}_J$	angular momentum of the gas in the exhaust jet
$h_x, h_{\tilde{y}}, h_{\tilde{z}}$	aeroballistic system components of the angular momentum of the gas in the rocket motor
$I_x, I_t$	axial and transverse moments of inertia
$J_p$	$\dot{m} R_n^2 F - \dot{I}_x = (\ell/V) \cdot$ spin jet damping moment
$J_q$	$\dot{m} X_n^2 - \dot{I}_t = (\ell/V) \cdot$ pitch jet damping moment
$\ell$	reference length
$M_x, M_{\tilde{y}}, M_{\tilde{z}}$	aeroballistic components of the aerodynamic moment
$m$	mass of the rocket body-plus-propellant system at time $t_0$
$p, \tilde{q}, \tilde{r}$	rocket spin, pitch and yaw rates in the aeroballistic system
$R$	polar distance coordinate, $0 \leq R \leq R_n$
$\hat{R}$	$R/R_n$
$\vec{R}_J$	position vector of the gas in the exhaust jet
$R_n$	radius of the rocket nozzle exit
$S$	reference area
$t$	time
$u$	x-component of the velocity of the rocket body-plus-propellant system at time $t_0$

LIST OF SYMBOLS  
(Continued)

$u_J, \tilde{v}_J, \tilde{w}_J$	aeroballistic system components of $\vec{V}_J$
$V$	magnitude of the velocity vector
$\vec{V}_J$	velocity of the gas in the exhaust jet relative to the rocket
$x, \tilde{y}, \tilde{z}$	nonrolling aeroballistic axes, with the x-axis along the rocket's axis of symmetry and the z-axis initially downward
$X_n$	distance from the rocket c.m. to the rocket nozzle exit
$\gamma$	$-\left(J_p\right)_{\max} / \dot{I}_x$
$\Delta m$	the change in mass of the rocket body-plus-propellant system in the time interval $\Delta t$
$\epsilon$	a nondimensional constant in the range 0 to 1 .
$\theta$	polar angular coordinate
$\rho$	air density
$\rho_J$	density of the gas in the exhaust jet
Subscript:	
$( )_{\max}$	value at $f(\hat{R}) = \hat{R}, F = 1/2$

# DISTRIBUTION LIST

<u>No. of Copies</u>	<u>Organization</u>	<u>No. of Copies</u>	<u>Organization</u>
12	Commander Defense Technical Info Center ATTN: DDC-DDA Cameron Station Alexandria, VA 22314	1	Commander US Army Aviation Research and Development Command ATTN: DRSAB-E P.O. Box 209 St. Louis, MO 63166
1	Commander US Army Materiel Development and Readiness Command ATTN: DRCDMD-ST 5001 Eisenhower Avenue Alexandria, VA 22333	1	Director US Army Air Mobility Research and Development Laboratory Ames Research Center Moffett Field, CA 94035
2	Commander US Army Armament Research and Development Command ATTN: DRDAR-TSS Dover, NJ 07801	1	Commander US Army Communications Research and Development Command ATTN:: DRDCO-PPA-SA Fort Monmouth, NJ 07703
6	Commander US Army Armament Research and Development Command ATTN: DRDAR-LCA-F, Mr. A. Loeb DRDAR-LCA-FA, Mr. S. Wasserman Mr. D. Mertz DRDAR-LCA, Mr. W.R. Benson DRDAR-LCU, Mr. A. Moss DRDAR-LCU-CA, Mr. S. Harnett Dover, NJ 07801	1	Commander US Army Electronic Research and Development Command Technical Support Activity ATTN: DELSD-L Fort Monmouth, NJ 07703
1	Commander US Army Armament Readiness Command ATTN: DRSAR-LEP-L, Tech Lib Rock Island, IL 61299	1	Commander US Army Missile Command ATTN: DRSMI-R Redstone Arsenal, AL 35809
1	Director US Army ARRADCOM Benet Weapons Laboratory ATTN: DRDAR-LCB-TL Watervliet, NY 12189	1	Commander US Army Missile Command ATTN: DRSMI-RDK, Mr. R.A. Deep Redstone Arsenal, AL 35809

# DISTRIBUTION LIST

<u>No. of Copies</u>	<u>Organization</u>	<u>No. of Copies</u>	<u>Organization</u>
1	Commander US Army Tank Automotive Research and Development Command ATTN: DRDTA-UL Warren, MI 48090	1	Commander David W. Taylor Naval Ship Research & Development Center ATTN: Aerodynamics Laboratory Bethesda, MD 20084
1	Commander US Army Yuma Proving Ground ATTN: STEYP-TMW, Mr. W.T. Vomocil Yuma, AZ 85364	5	Commander Naval Surface Weapons Center ATTN: Dr. Thomas Clare Dr. W.R. Chadwick Dr. W.G. Soper Dr. F. Moore Dr. T.R. Pepitone Dahlgren, VA 22448
1	Commander US Army Research Office ATTN: CRD-AA-EH P.O. Box 12211 Research Triangle Park NC 27709	1	Commander Naval Surface Weapons Center ATTN: Code 730, Tech Lib Silver Spring, MD 20910
1	Director US Army TRADOC Systems Analysis Activity ATTN: ATAA-SL, Tech Lib White Sands Missile Range NM 88002	1	Commander Naval Weapons Center ATTN: Code 233 China Lake, CA 93555
1	Commander Naval Air Systems Command ATTN: AIR-604 Washington, DC 20360	1	Commander Naval Research Laboratory ATTN: Tech Info Div Washington, DC 20375
3	Commander Naval Ordnance Systems Command ATTN: ORD-0632 ORD-035 ORD-5524 Washington, DC 20360	1	Superintendent Naval Postgraduate School Monterey, CA 93940
1	Commander Naval Air Development Center, Johnsville Warminster, PA 18974	1	AFATL (Tech Lib) Eglin AFB, FL 32542
		1	ASD (ASAMCG) Wright-Patterson AFB, OH 45433

# DISTRIBUTION LIST

<u>No. of Copies</u>	<u>Organization</u>	<u>No. of Copies</u>	<u>Organization</u>
4	Director National Aeronautics and Space Administration Ames Research Center ATTN: Dr. Gary Chapman Mr. A. Seiff Mr. Murray Tobak Tech Lib Moffett Field, CA 94035	2	Director Jet Propulsion Laboratory ATTN: Tech Lib, Mr. Peter Joffe 4800 Oak Grove Drive Pasadena, CA 91103
1	Director National Aeronautics and Space Administration George C. Marshall Space Flight Center ATTN: MS-I, Library Huntsville, AL 35812	3	Director Sandia Laboratories ATTN: Division 1342, Mr. W.F. Hartman Division 1331, Mr. H.R. Vaughn Mr. A.E. Hodapp Albuquerque, NM 87115
2	Director National Aeronautics and Space Administration Langley Research Center ATTN: MS 185, Tech Lib Dr. Clarence Young Langley Station Hampton, VA 23365	1	Aerospace Corporation ATTN: Dr. Daniel Platus 2350E El Segundo Avenue El Segundo, CA 90245
1	Director National Aeronautics and Space Administration Lewis Research Center ATTN: Tech Lib 21000 Brookpark Road Cleveland, OH 44135	1	Calspan Corporation P.O. Box 235 Buffalo, NY 14221
1	Director National Aeronautics and Space Administration Scientific and Technical Information Facility P.O. Box 8757 Baltimore/Washington Inter- national Airport, MD 21240	1	General Electric Company Armament Systems Department ATTN: Mr. Robert H. Whyte Lakeside Avenue Burlington, VT 05401
		1	California Polytechnic State University ATTN: Dr. John D. Nicolaides Aeronautical Engineering Dept San Luis Obispo, CA 93401
		1	Director Applied Physics Laboratory The Johns Hopkins University Johns Hopkins Road Laurel, MD 20810

# DISTRIBUTION LIST

<u>No. of Copies</u>	<u>Organization</u>	<u>No. of Copies</u>	<u>Organization</u>
1	Stanford University ATTN: Department of Aero- nautical Engineering Stanford, CA 94305	1	University of Virginia Department of Engineering Science and Systems ATTN: Professor Ira D. Jacobson
1	University of California ATTN: Professor E.V. Laitone Berkeley, CA 94704		Thornton Hall Charlottesville, VA 22904
1	University of Illinois Department of Aeronautical Engineering ATTN: Professor A.I. Ormsbee Urbana, IL 61801		<u>Aberdeen Proving Ground</u>  Dir, USAMSAA ATTN: DRXSY-D DRXSY-MP, H. Cohen  Cdr, USATECOM ATTN: DRSTE-TO-F  Dir, Wpns Sys Concepts Team Bldg. E3516, EA ATTN: DRDAR-ACW

## USER EVALUATION OF REPORT

Please take a few minutes to answer the questions below; tear out this sheet and return it to Director, US Army Ballistic Research Laboratory, ARRADCOM, ATTN: DRDAR-TSB, Aberdeen Proving Ground, Maryland 21005. Your comments will provide us with information for improving future reports.

1. BRL Report Number \_\_\_\_\_

2. Does this report satisfy a need? (Comment on purpose, related project, or other area of interest for which report will be used.)  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

3. How, specifically, is the report being used? (Information source, design data or procedure, management procedure, source of ideas, etc.) \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

4. Has the information in this report led to any quantitative savings as far as man-hours/contract dollars saved, operating costs avoided, efficiencies achieved, etc.? If so, please elaborate.  
\_\_\_\_\_  
\_\_\_\_\_

5. General Comments (Indicate what you think should be changed to make this report and future reports of this type more responsive to your needs, more usable, improve readability, etc.) \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

6. If you would like to be contacted by the personnel who prepared this report to raise specific questions or discuss the topic, please fill in the following information.

Name: \_\_\_\_\_

Telephone Number: \_\_\_\_\_

Organization Address: \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_